


EVE E-50Z

HIGHLIGHTS

- LED Ellipsoidal shines a hard-edged, warm white spot in any direction
- Easily highlight areas by altering the projected beam with framing shutters
- Flexibility to project from any distance using the manual zoom
- D-Fi USB compatibility for wireless Master/Slave or DMX control
- Flicker-free operation suitable for on-camera use
- Includes holders for glass and steel gobos and a gel frame
- Save time running extension cords by power linking multiple units
- Eliminate the need for DMX control with standalone operation
- Available in black or white

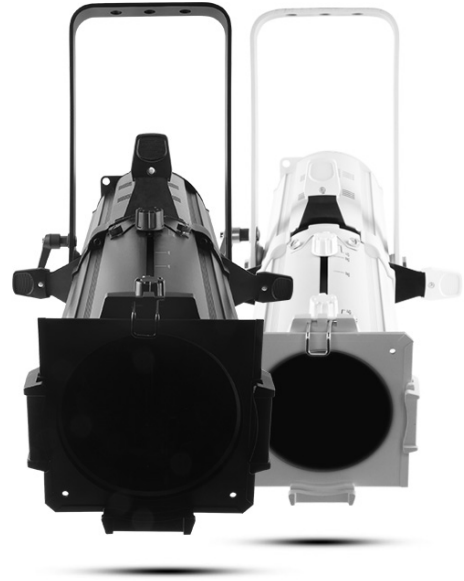

SPECIFICATIONS

- DMX Channels : 1 or 3
- DMX Connectors : 3-pin XLR
- Light Source : 1 LED (warm white) 50 W, (1.3 A), 50,000 hours life expectancy
- Strobe Rate : 0 to 29 Hz
- PWM Frequency : 1.2 kHz
- Illuminance : (20°): 7,910 lux @ 2 m
(39°): 2,710 lux @ 2 m
(20°): 1,479 lux @ 5 m
(39°): 508 lux @ 5 m
- Power Linking : 16 units @ 120 V; 26 units @ 230 V
- Input Voltage : 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current : 59 W, 0.5 A @ 120 V, 60 Hz
63 W, 0.3 A @ 230 V, 50 Hz
- Gobo Size : D (53.3 mm outside, 43 mm image, 2mm max thickness)
- Zoom Angle : (manual): 20° to 39°
- Weight : 9.2 lb (4.2 kg)
- Size : 18.9 x 6.2 x 15 in (480 x 157 x 381 mm)
- Approvals : CE, MET
- Color Temperature : 3500 K
- Gel Frame Size : 5.5 in (140 mm)
- Optional Controllers : D-Fi USB
- CRI : 80